

I-SFT 160i.15X Rev.3

G23916-B0065-H113

15" XGA open frame display, integrated inverter



industrial solutions
flatpanel technology

Industrial Displays for Extreme Conditions

15" XGA high-bright


sunlight readable

energy efficient

extended temperature range

rugged system

LVDS - interface

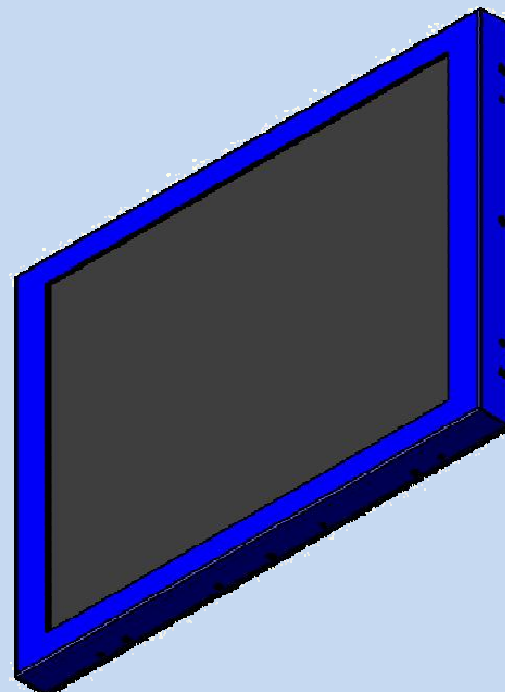

i-sft plus

MTTH 50,000 h @ full temp
integrated inverter, fanless
shock / vibration resistant
cold start capable



Key Features (see back for details) This is not an official specification.

Luminance	1600 cd/m
Dimming	1 : 1000
Contrast	950 : 1 (typ.)
Viewing angle (CR10)	65°/65°/65°/50°
Temperature, operating	-10°C to +60°C
Temperature, storage	-25°C to +70°C
Cold start	-10°C
Shock	35 g @ 6 ms*
Vibration	3 g @ 10-2000 Hz*
MTTH	>50,000 h over full temperature range
Power incl. inverter	40 Watt (typ.)

*target specification

customized versions on request

