

# I-SFT 50i.2b

G23916-B0065-H145

10.5" VGA open frame display, integrated inverter



industrial solutions  
flatpanel technology

Industrial Displays for Extreme Conditions


## 10.5" VGA high-bright

ultra-wide temperature range

rugged system

daylight readable

long lifetime

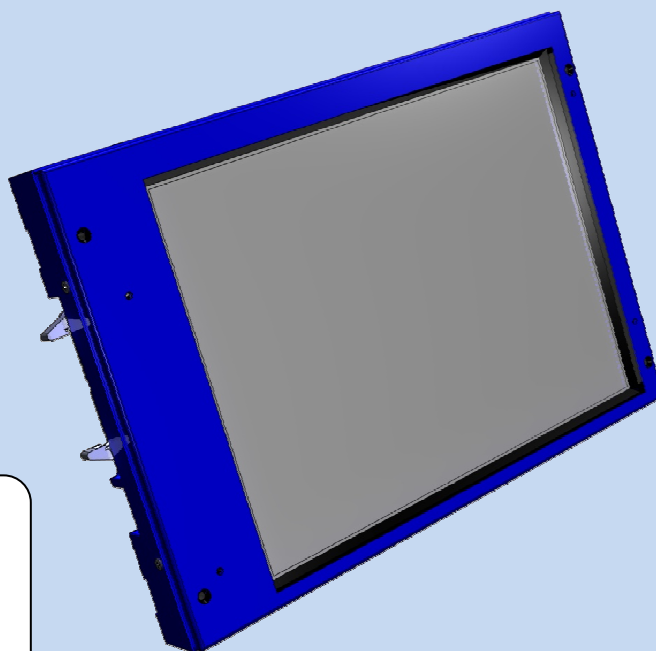

i-sft plus

MTTH 50,000 h @ full temp  
integrated inverter, fanless  
shock / vibration resistant  
cold start capable



### Key Features (see back for details) This is not an official specification.

Luminance	500 cd/m <sup>2</sup>
Dimming	1 : 1000
Contrast	>450 : 1
Viewing angle	55°/30°/55°/55° (typ)
Temperature, operating	-25°C to +85°C
Temperature, storage	-35°C to +85°C
Cold start	-25°C
Shock	50 g @ 11 ms
Vibration	3 g @ 5-2000 Hz
MTTH	50 000 h over the full temperature range
Power incl. inverter	13W (typ.)

customized versions on request

